

**Prestone**  
**MAX**

# PRESTONE<sup>®</sup> MAX ALL VEHICLES Antifreeze+Coolant




**MAXIMUM  
ENGINE PROTECTION\***


GUARANTEED FOR  
**ALL VEHICLES**  
Makes, Models & Years

- 15+ Years/350,000 Miles Fluid Guaranteed for the life of your vehicle\*\*
- Extreme Freeze & Boil Over Protection -50°/+268°F
- Industry Leading Protection From Engine-Damaging Rust & Corrosion
- Works with all fluid colors

**Industry Leading Protection From Engine-Damaging Rust & Corrosion**

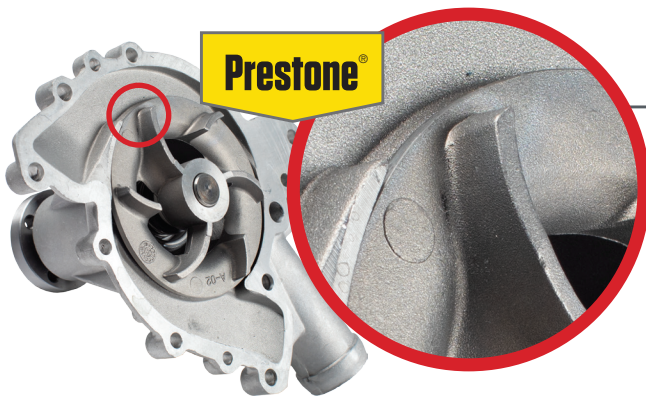

vs

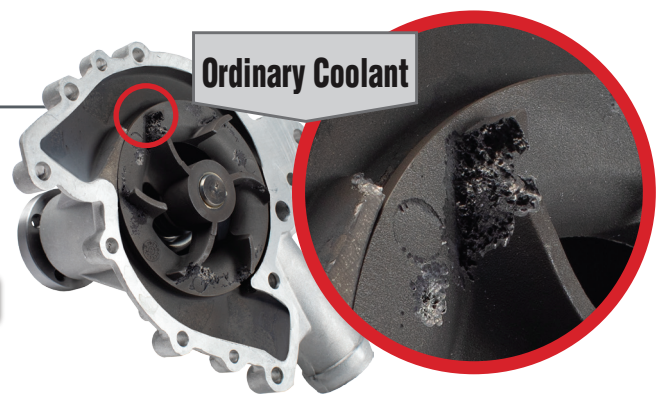

Engine Water Pump

ASTM Water Pump  
**300 HOUR**  
High Stress Test<sup>†</sup>

<sup>†</sup>ASTM Water Pump part tested to 300 hrs / high stress test.

✓ **CLEAN = IMPROVED PERFORMANCE & LONGER ENGINE LIFE**

✗ **DIRTY = COSTLY REPAIRS**

\*Over the total life of the coolant \*\*Fluid guaranteed for the life of your vehicle: This product is guaranteed for 15+ years/up to 350,000 miles of vehicle life under normal driving conditions when a complete cooling system flush and fill is performed, and proper cooling system maintenance is followed. Always follow vehicle owner's manual for top off requirements, change intervals and specified maintenance. Based on US DOT national avg. miles driven in 2019. The average number of miles driven in 2019 was 14,664 miles. 350,000 miles/14,664 miles per year = 23.9 years. Prestone.com or 1-888-269-0750 for all guarantee requirements and limitations



# PRESTONE<sup>®</sup> MAX ALL VEHICLES Antifreeze+Coolant

READY TO USE	PACK	UPC
AF2850	6/1 gal	7 97496-88238 7

## AF2850 TECHNICAL DATA

Composition by Weight	Typical Values
Antifreeze/Coolant Concentrate:	56%
Total Water:	44%
Dyes:	Trace

Properties	Typical Values	Tests
Color:	Fluorescent Yellow	
Odor:	Characteristic	
Ash Content:	0.5% by weight	ASTM D1119
pH:	8.0 - 8.6	ASTM D1287
Reserve Alkalinity:	3.0	ASTM D1121
Density at 15°C, g/mL:	1.0751	ASTM D1122
Freezing Point:	-50°F (-45°C)	ASTM D1177
Boiling Point: <i>Under standard pressure</i>	+229°F (+109°C)	ASTM D1120
Foam Test:	62 mL/1.9 sec.	ASTM D1881

CONCENTRATE	PACK	UPC
AF2800	6/1 gal	7 97496-88236 3

## AF2800 TECHNICAL DATA

Composition by Weight	Typical Values
Antifreeze/Coolant Concentrate:	97.1%
Total Water:	2.9%
Dyes:	Trace

Properties	Typical Values	Tests
Color:	Fluorescent Yellow	
Odor:	Characteristic	
Ash Content:	1.0% by weight	ASTM D1119
pH at 50 vol%:	8.0 - 8.6	ASTM D1287
Reserve Alkalinity:	6.1	ASTM D1121
Density at 15°C, g/mL:	1.1165	ASTM D1122
Freezing Point at 56 vol%:	-50°F (-45°C)	ASTM D1177
Boiling Point at 56 vol%: <i>Under standard pressure</i>	+229°F (+109°)	ASTM D1120
Foam Test:	62 mL/1.9 sec.	ASTM D1881

### MEETS THE PERFORMANCE REQUIREMENTS OF

ASTM D3306, ASTM 4985, WSS-M97B51-A1 (GO-5 HOAT), GM-6277M, WSS-M97B55-A (P-OAT), GMW 3420, Ford WSS-M97B44-D, Ford WSS-M97B57-A1/2, Fiat/Chrysler MS12106, Fiat/Chrysler MS-7170, Fiat/Chrysler MS-9769, JIS K2234, Nissan Type L25500P, Hyundai MS591-08, Audi / VW TL 774, BMW N 600 69.0, Mercedes-Benz Specification 325.0, Volvo Car 1286083, Honda Type 2

### WILL NOT VOID VEHICLE WARRANTY

#### AMERICAN VEHICLES

Ford <sup>®</sup>	Lincoln <sup>®</sup>	Mercury <sup>®</sup>	Chrysler <sup>®</sup>	GM <sup>®</sup>	Dodge <sup>®</sup>
Jeep <sup>®</sup>	Chevrolet <sup>®</sup>	GMC <sup>®</sup>	Buick <sup>®</sup>	Ram <sup>®</sup>	Cadillac <sup>®</sup>
Saturn <sup>®</sup>	Pontiac <sup>®</sup>	Oldsmobile <sup>®</sup>			

#### ASIAN VEHICLES

Toyota <sup>®</sup>	Lexus <sup>®</sup>	Honda <sup>®</sup>	Acura <sup>®</sup>	Nissan <sup>®</sup>	Infiniti <sup>®</sup>
Kia <sup>®</sup>	Hyundai <sup>®</sup>	Subaru <sup>®</sup>	Mazda <sup>®</sup>	Suzuki <sup>®</sup>	Genesis <sup>®</sup>

#### EUROPEAN VEHICLES

Audi <sup>®</sup>	BMW <sup>®</sup>	Jaguar <sup>®</sup>	Fiat <sup>®</sup>	Mini <sup>®</sup>	VW <sup>®</sup>
Porsche <sup>®</sup>	Mercedes <sup>®</sup>	Saab <sup>®</sup>	Volvo <sup>®</sup>	Alfa Romeo <sup>®</sup>	
Land Rover <sup>®</sup>	Range Rover <sup>®</sup>				

### FOR USE IN

Cars, SUVs, CUVs & Minivans	Yes
Trucks: Light & Medium Duty	Yes

### ALL MANUFACTURERS

### COOLANT FLUID PERFORMANCE

Years/Miles	Up to 15+ years or 350,000 miles**
Fluid Color	Yellow
Compatibility	OAT, POAT, HOAT, IAT, G05 <sup>®</sup> , G11 <sup>®</sup> , G12 <sup>®</sup> ++, G13 <sup>®</sup> , G30 <sup>®</sup> , G40 <sup>®</sup> , GG40 <sup>®</sup>
Corrosion	Meets ASTM D3306 & D4985

\*\*Fluid guaranteed for the life of your vehicle: This product is guaranteed for 15+ years/up to 350,000 miles of vehicle life under normal driving conditions when a complete cooling system flush and fill is performed, and proper cooling system maintenance is followed. Always follow vehicle owner's manual for top off requirements, change intervals and specified maintenance.